


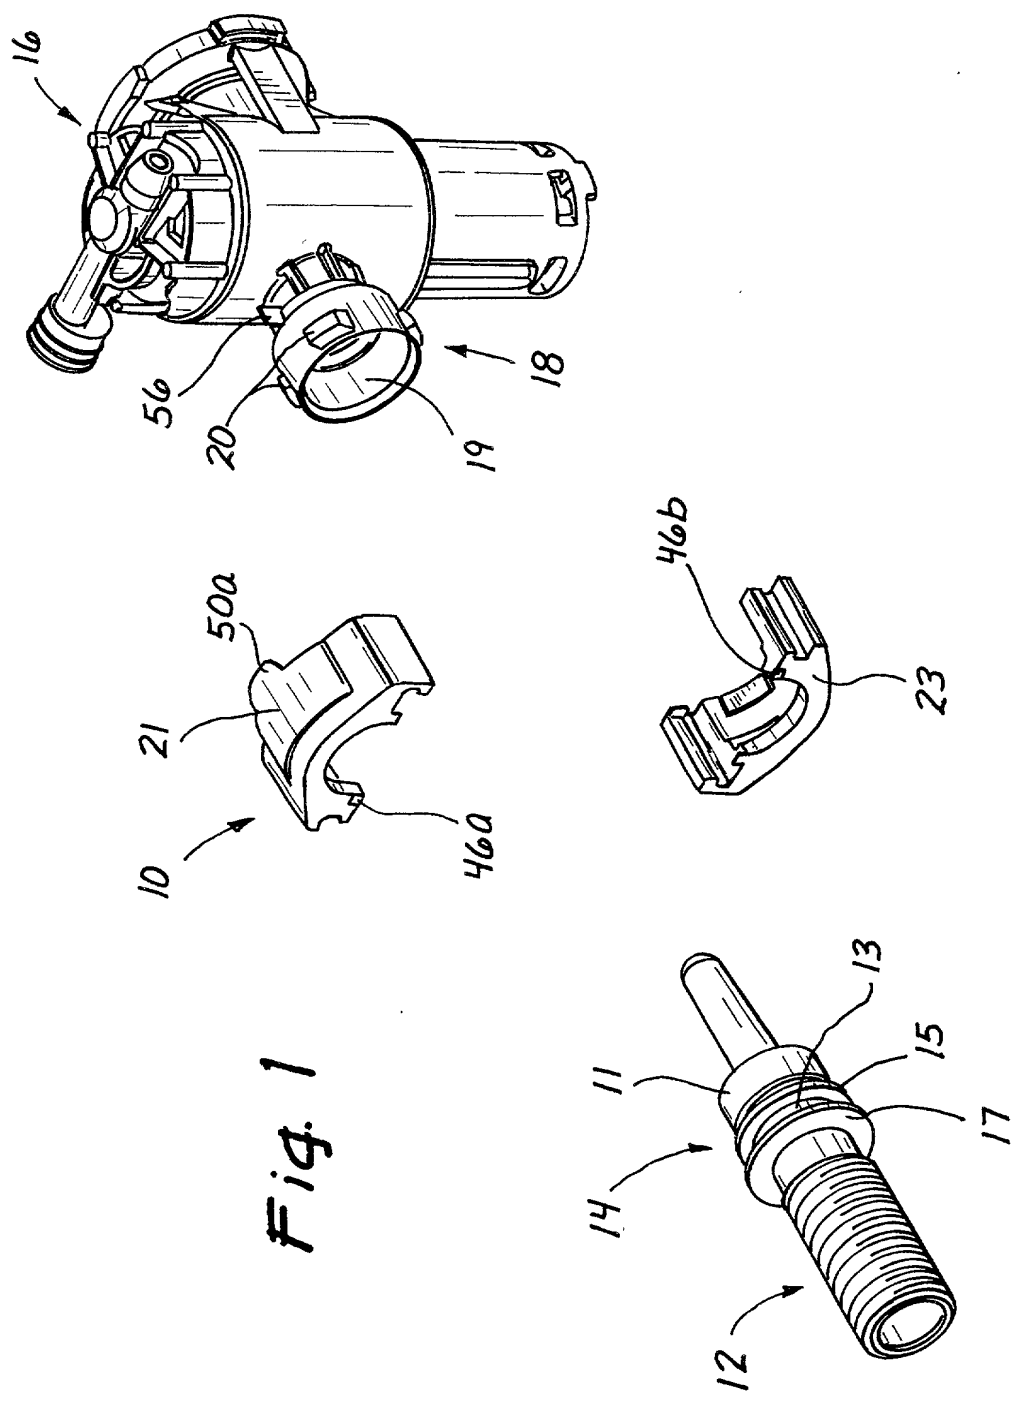
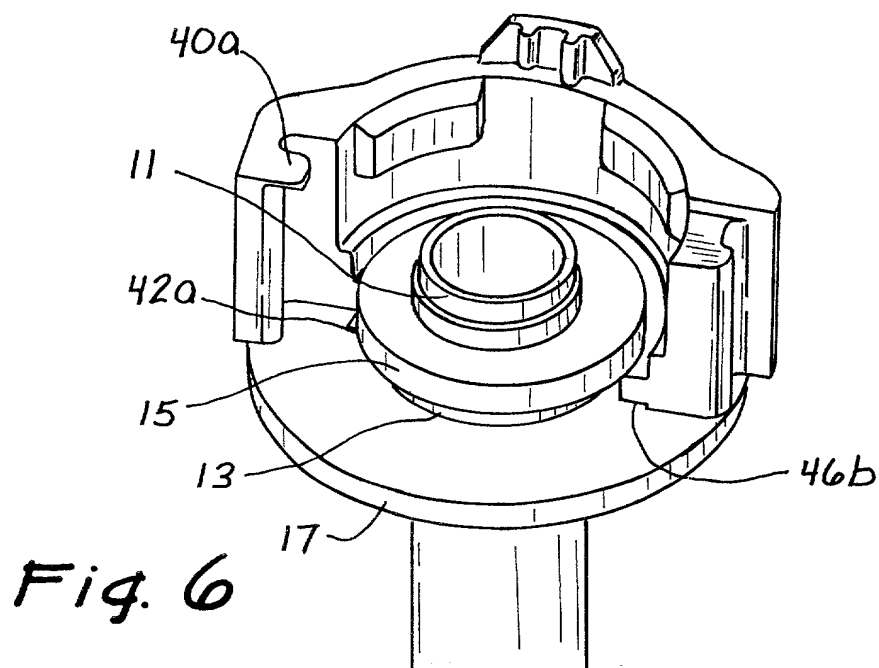



FIG. 1 is a perspective view of a mechanical assembly 10, including a main body 11, a handle 12, a shaft 13, a nut 14, a washer 15, and a threaded rod 17. The handle 12 is connected to the shaft 13 via the nut 14 and washer 15. The threaded rod 17 is inserted through the handle 12 and the main body 11. The main body 11 includes a top flange 16, a side flange 18, and a bottom flange 19. The handle 12 is shown in a partially exploded view, with a detail 21 showing a cross-section of the handle 12 and a detail 23 showing a cross-section of the handle 12 and the shaft 13. The handle 12 is shown in a partially exploded view, with a detail 21 showing a cross-section of the handle 12 and a detail 23 showing a cross-section of the handle 12 and the shaft 13.

Fig. 1

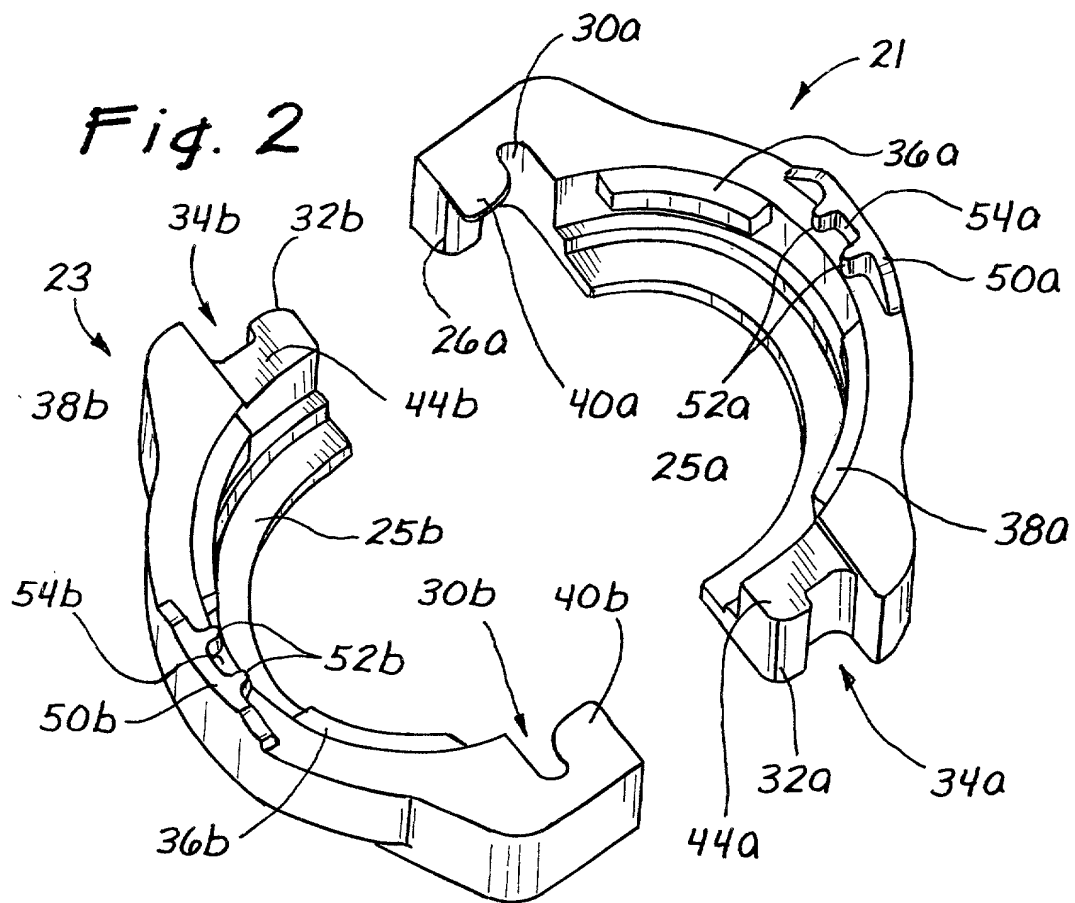

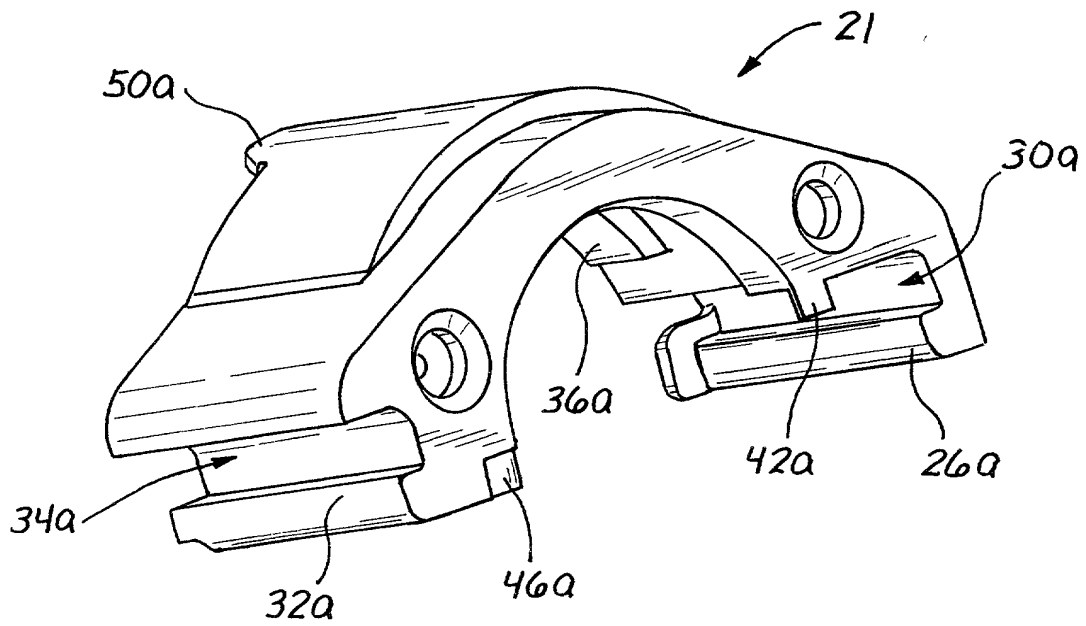

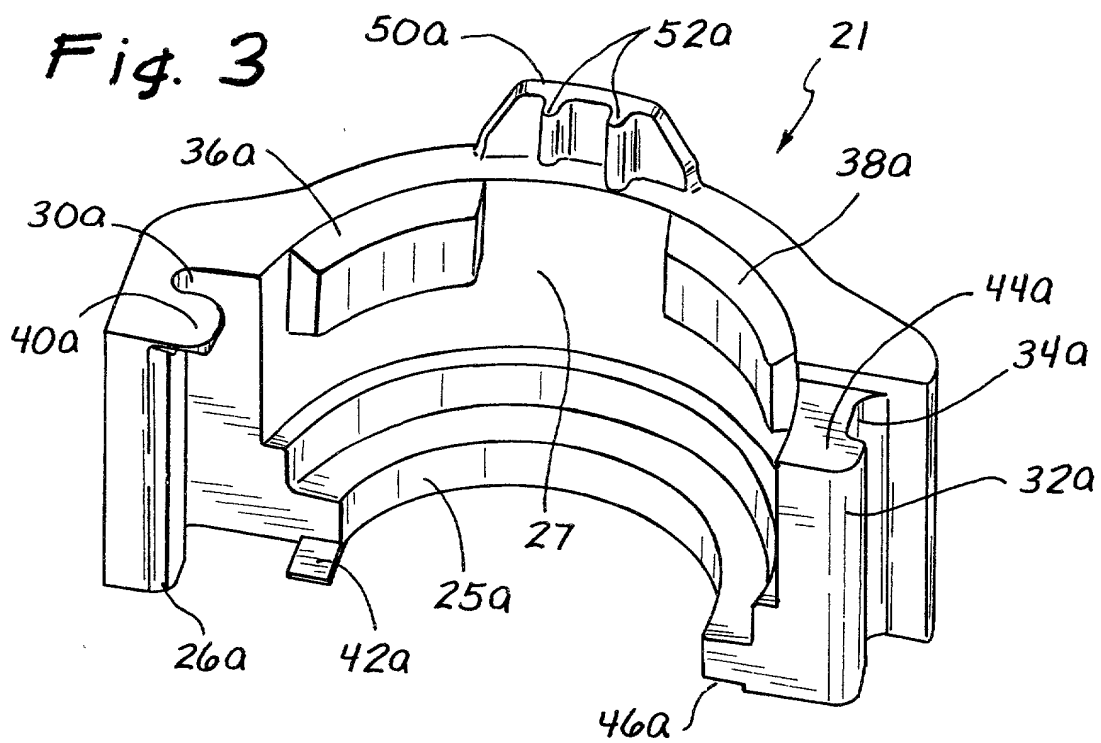

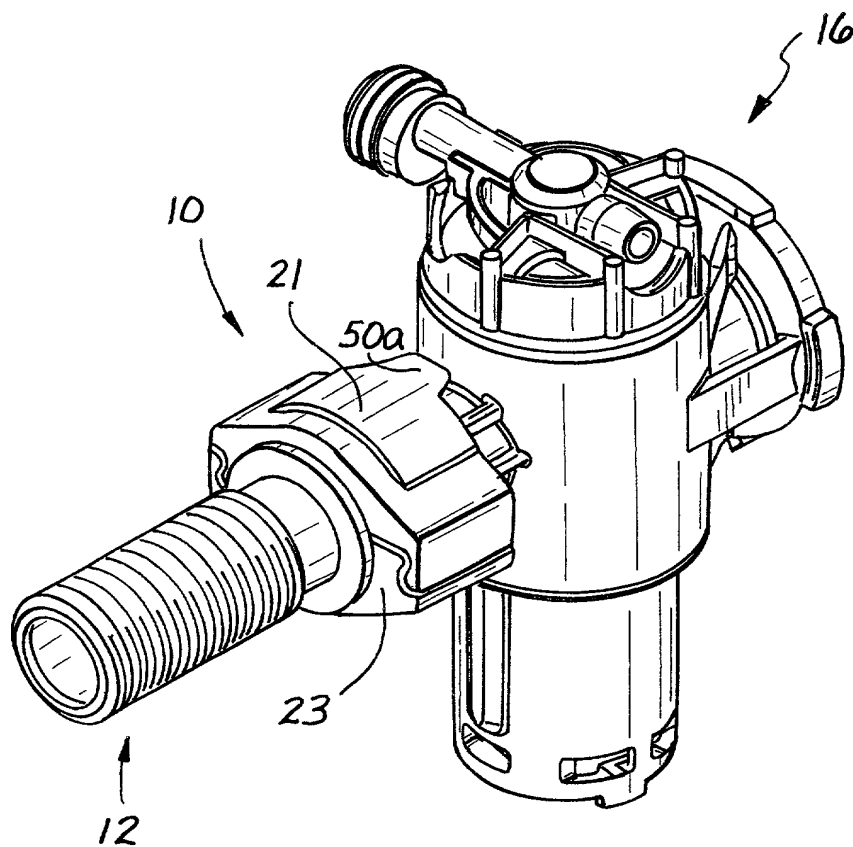

*Fig. 5*

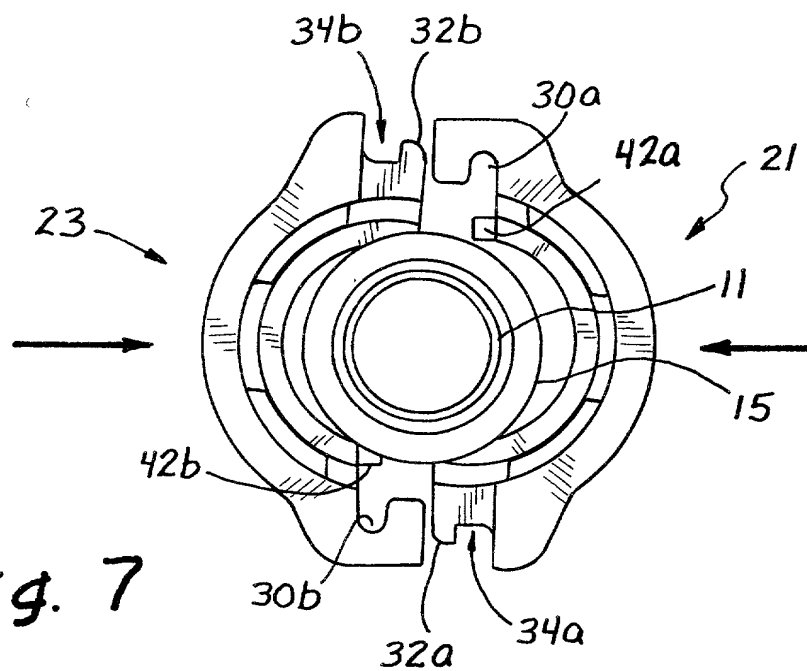


Fig. 7

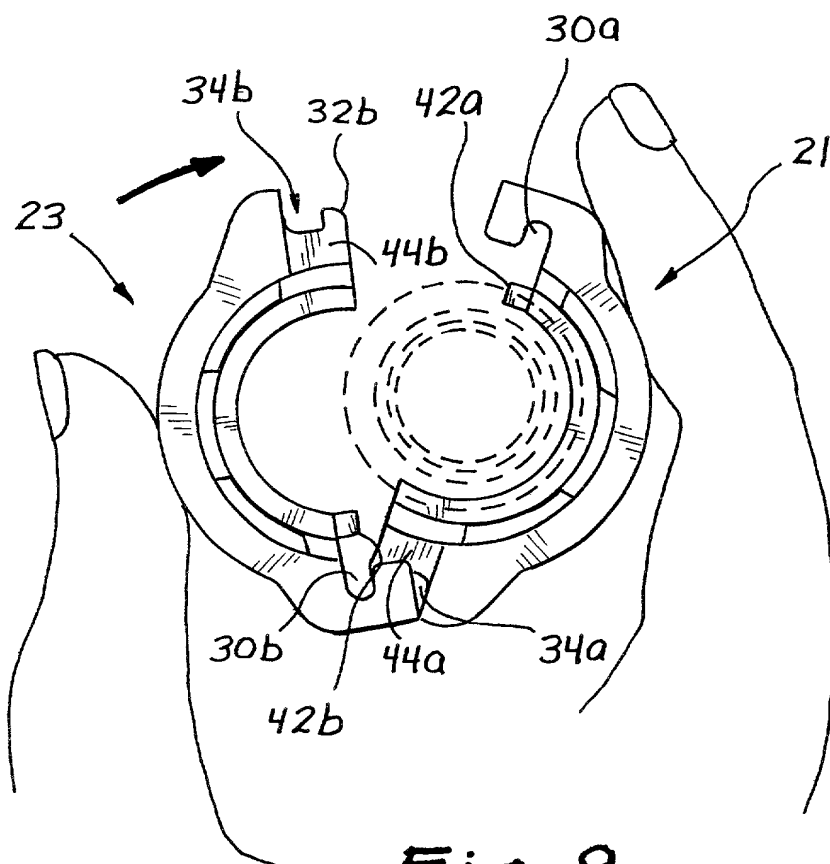


Fig. 8